


# ProDAQ Data Acquisition Function Cards

## ProDAQ 3510 16-Channel, 16-Bit DAC Function Card

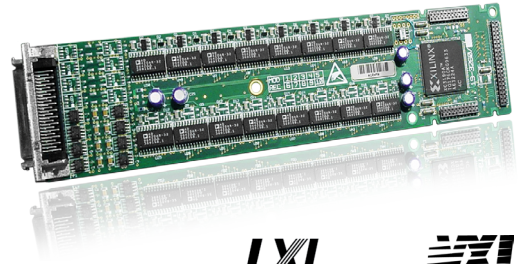

LXI

  
bus

### OVERVIEW

The ProDAQ 3510 Digital-to-Analog Converter Function Card is one of the ProDAQ high density cards, which can be fitted into the ProDAQ Motherboards. ProDAQ modules are the most versatile VXIbus modules in the market. They provide the user with the highest channel density and functionality available today.

This high density card contains 16 independent, 16-bit DAC channels. Each channel is equipped with his own DAC. The ProDAQ 3510 DAC Function Card is specially designed for DC, low frequency and current loop applications.

There are three different standard voltage output versions of the ProDAQ 3510 available with ranges of either 0 to 10V,  $\pm 10$  V or  $\pm 20$  Volt, and one current output version with programmable ranges of 4-20 mA, 0-20 mA or 0-24 mA. Three other standard versions provide output ranges suitable for thermocouple simulation:  $\pm 50$  mV for thermocouple types B, and C; 0 to 50 mV for thermocouple types N, R, S and T; 0 to 100 mV for thermocouple types E, J and K. Versions with custom output ranges are available on request.

All voltage outputs have continuous short circuit protection. All current outputs have an overvoltage protection. If high current is used on multiple channels the number of DAC cards that can be installed into one motherboard module may be restricted due to the supply limitations in the VXIbus power specifications.

ProDAQ modules provide compability with all current popular software environments and allow users to safely and simply expand their existing hardware and software systems.

The ProDAQ 3510 DAC Function Card is supplied with VXIplug&play drivers for Windows. Drivers for Linux and VxWorks are available on request.

All **ProDAQ function cards** can be used in both ProDAQ VXIbus motherboards and LXI function card carriers, providing users with the highest channel density and functionality available today.

### Features & Benefits

- ▶ **16 independent DACs**
- ▶ **16-bit resolution**
- ▶ **Different output ranges**  
available
- ▶ **Voltage or Current Output Versions**
- ▶ **Thermocouple simulation**
- ▶ **Flexible triggering**
- ▶ **Up to 128 DAC channels**  
per VXIbus Slot or 1U  
19inch rack space

For more information,  
visit [www.bustec.com](http://www.bustec.com).

Learn more about the  
**ProDAQ 3510** on our website  
by scanning the code below.





## SPECIFICATIONS

### SAMPLING

Resolution	16-bit
Number of Channels	16

### OUTPUT CHARACTERISTICS 3510-Ax/-Bx/-Tx (Voltage Versions)

Output Range	0-10 V, $\pm 10$ V, $\pm 20$ V
Output Current	5 mA per channel

Output Coupling	DC
-----------------	----

Cut-off Frequency	280 Hz
-------------------	--------

Output Impedance	< 0.05 $\Omega$ max.
------------------	----------------------

Settling Time	< 5 msec to 0.1 % FSR (resistive load)
---------------	--

Offset	< 1 mV typical (calibrated)
--------	-----------------------------

Accuracy	< $\pm(0.01$ % Setting + 1.5 LSB)
----------	-----------------------------------

	Voltage (V)	Current (mA)
Current Consumption	+24	100
	+12	100
	+5	150
	-12	100
	-24	100

### 3510-CC (Current Version)

Output Range	0-20 mA, 0-24 mA (Overrange Function), 4-20 mA
--------------	--

Current Loop Voltage Compliance	21.5 V
---------------------------------	--------

Output Filter Bandwidth	100 Hz
-------------------------	--------

Output Impedance	25 $\Omega$
------------------	-------------

Output Protection	Diode clamped to +24 V and Ground
-------------------	-----------------------------------

Settling Time	3.5 msec with 500 $\Omega$ (load dependent)
---------------	---

Offset	+9 $\mu$ A typical
--------	--------------------

Accuracy	0.16 % typical (FSD)
----------	----------------------

Output Nonlinearity	0.012 % max
---------------------	-------------

	Voltage (V)	Current (mA)
Current Consumption	+24	80
	-24	80
	+5	120

### FRONT PANEL I/O

Connectors	50-pin SCSI female
------------	--------------------

### PHYSICAL CHARACTERISTICS

Dimensions	230 x 53 mm
------------	-------------

Weight	79 g
--------	------

### ENVIRONMENTAL

Temperature	0 $^{\circ}$ C to +50 $^{\circ}$ C (operational) -40 $^{\circ}$ C to +70 $^{\circ}$ C (storage only)
-------------	---

Humidity	10 % - 90 % (non-condensing)
----------	------------------------------

Warm-up Time	< 30 minutes
--------------	--------------

### SUPPORT

Software support	Driver support for Microsoft Windows, VxWorks, and Linux (Contact Bustec Ltd. for more information)
------------------	---

Configuration	Cards can be factory installed or field installed by user
---------------	---

Warranty Period	12 months (extended periods available at additional cost)
-----------------	---

## Ordering Information

- ▶ **3510-AB** 16-ch., 16-bit DAC, 0-10 V output
- ▶ **3510-BB** 16-ch., 16-bit DAC,  $\pm 10$  V output
- ▶ **3510-BC** 16-ch., 16-bit DAC,  $\pm 20$  V output
- ▶ **3510-CC** 16-ch., 16-bit DAC, current output
- ▶ **3510-TB** 16-ch., 16-bit DAC,  $\pm 50$  mV, TC Types B/C
- ▶ **3510-TN** 16-ch., 16-bit DAC, 0-50 mV, TC Types N/R/S/T
- ▶ **3510-TK** 16-ch., 16-bit DAC, 0-100 mV, TC Types E/J/K
- ▶ **Other ranges available**

### Related Products

- ▶ **ProDAQ 8010** data I/O cable, 50-pin SCSI to 50-pin SCSI connectors
- ▶ **ProDAQ 8011** data I/O cable, 50-pin SCSI to unterminated

## Contact Bustec

### ▶ Europe

Bustec Ltd.  
Bustec House  
Shannon, Co. Clare  
Ireland

T +353 61 707 100

F +353 61 707 106

E sales@bustec.com

### ▶ North America

Bustec, Inc.  
1507 East Valley Parkway  
Suite 3-412  
Escondido, CA 92027  
U.S.A.

T 909.797.0484

F 760.751.1284

E sales@bustec.com